

80 CFM FAN ASSEMBLY, GUARD,  
45PPI FOAM FILTER MEDIA,  
AND A MEDIA RETAINER

6 OUTLET SURGE SUPPRESSOR  
MOUNTED INSIDE OF CABINET  
WITH ACCESS HOLE IN BACK  
OF CABINET FOR CORDS/CABLES

REAR ACCESS PANEL


28.25 CABINET DEPTH

LOCKABLE UPPER DOOR  
MOUNTED ON PIANO  
HINGE WITH A  
WINDOW OPENING OF  
19.75W x 16.81H

0.12 THICK  
POLYCARBONATE  
(LEXAN)  
W/GLASSLIKE  
TRANSPARENCY

30.00 CABINET WIDTH

28.50 STATIC SHELF WIDTH

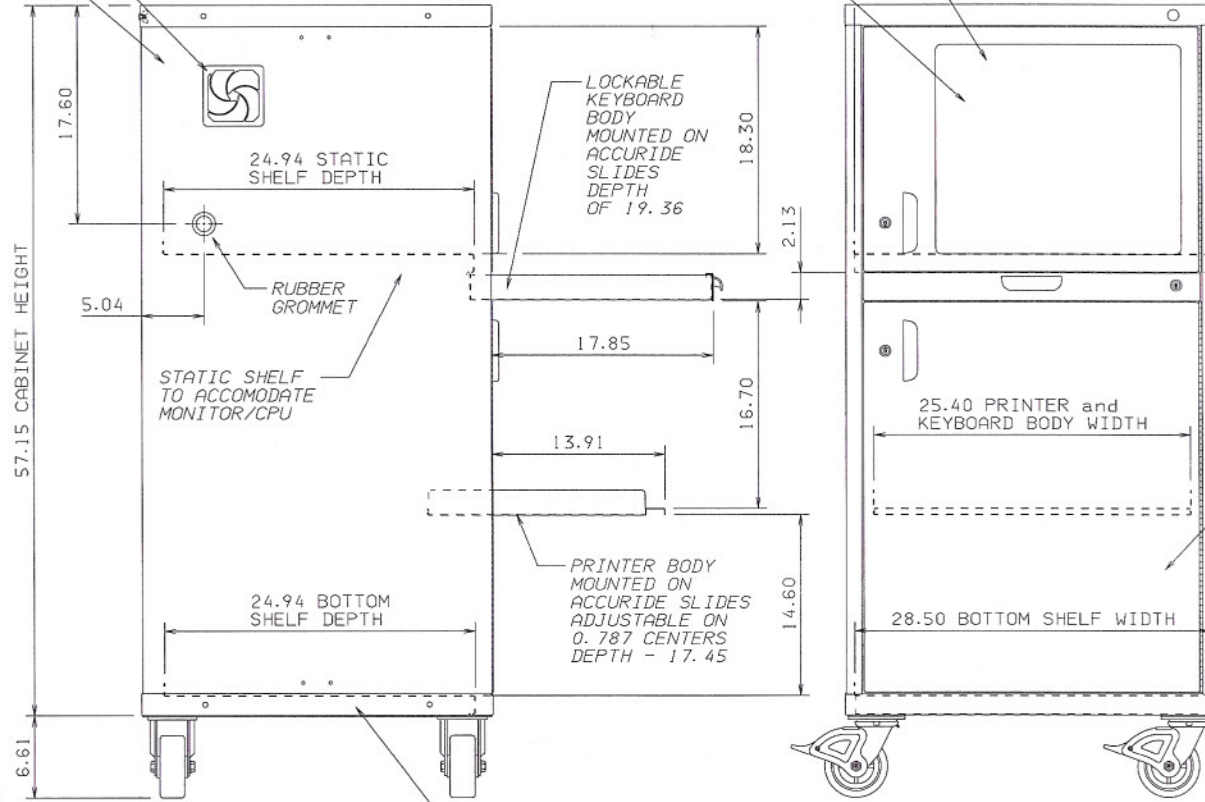

LOCKABLE  
KEYBOARD  
BODY  
MOUNTED ON  
ACCURIDE  
SLIDES  
DEPTH  
OF 19.36

24.94 STATIC  
SHELF DEPTH

RUBBER  
GROMMET

STATIC SHELF  
TO ACCOMODATE  
MONITOR/CPU

24.94 BOTTOM  
SHELF DEPTH

PRINTER BODY  
MOUNTED ON  
ACCURIDE SLIDES  
ADJUSTABLE ON  
0.787 CENTERS  
DEPTH - 17.45

25.40 PRINTER and  
KEYBOARD BODY WIDTH

28.50 BOTTOM SHELF WIDTH

LOCKABLE  
LOWER  
DOOR  
MOUNTED  
ON PIANO  
HINGE

BACK OF CABINET

LEFT SIDE OF CABINET

FRONT OF CABINET


CASTER FOOT BRAKE

BOTTOM SHELF  
TO ACCOMODATE CPU  
OR ACCESSORIES


OPTIONAL 5.00 DIA by 2.00 WIDE  
PERFORMA RUBBER SWIVEL CASTERS  
WITH TOTAL LOCK BRAKE FOR  
MOBILE APPLICATION

SEE OPPOSITE SIDE FOR FURTHER DETAILS

NOTICE: THIS IS A CONFIDENTIAL DISCLOSURE. OWNED BY SYMBASE SYSTEMS FOR REFERENCE PURPOSES ONLY	REL FOR PROD	---	08-29-01	RE
	SYN	REVISION	ECN	DATE BY
	RAW P/N	103477	WEIGHT(LB)	FINISH:
	DATE	08-29-01	DRAWN BY	CHECKED BY
		RE	DV	
	<b>LYON</b>		LYON METAL PRODUCTS	
			PO BOX 671 AURORA, IL 60507	
			(800) 323-0082 FAX: (800) 367-6681	
	MDCII	DESCRIPTION		
		PC CABINET OPTIONS/SPECS		
SHEET	DWG NUMBER	REV		
1	SS1379-AA	1		

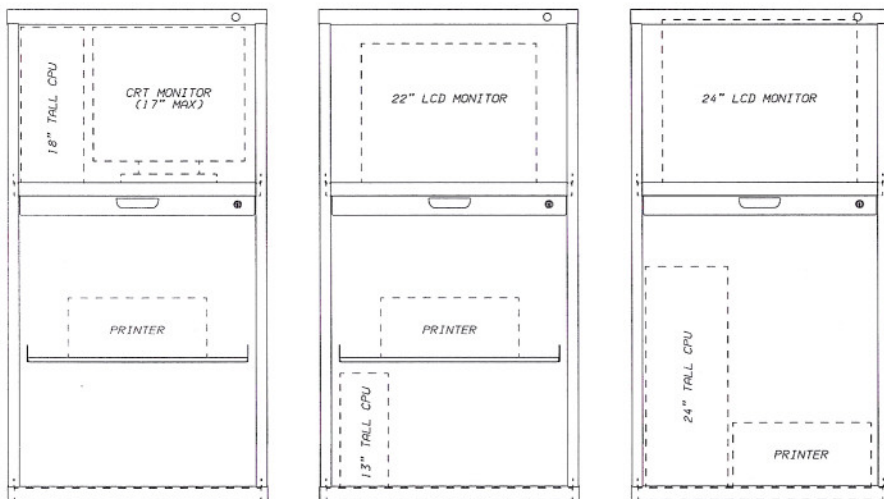


The PC Cabinet can accommodate a wide variety of CPU's, Monitors and Printers. Shown above is just a few of the installation configurations that can be done. The printer tray is height adjustable in 3/4" increments, allowing a multitude of positions. A Mid-tower case or a Mini-tower case can be placed on the top shelf along with a CRT monitor no larger than 17". Some 24" LCD monitor's can be placed on the top shelf without a CPU. A full-tower case can be placed on the bottom shelf with the printer tray removed. No matter what hardware you have, the cabinet can be configured to fit most anything.

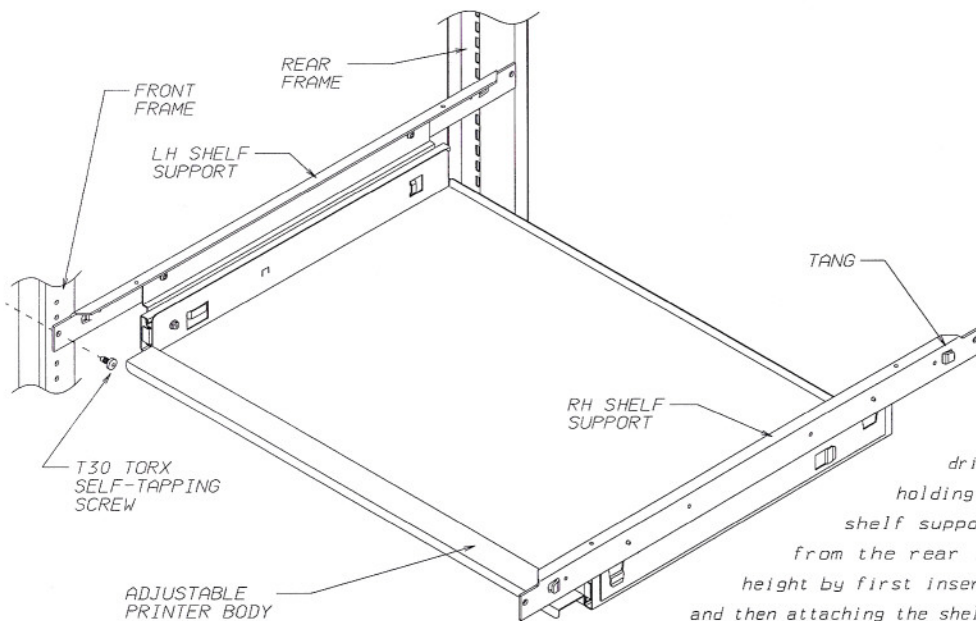

**ADJUSTMENT PROCEDURE for TRAY**

1) Printer body is assembled complete at the factory. To reposition the tray, using a T30 "TORX" driver, remove the two (2) self-tapping screws that are holding the shelf supports to the front frame. Grasp the shelf supports and pull out slightly to remove the tangs from the rear frame. Reposition the shelf to the desired height by first inserting the tangs into the slots on the rear frame, and then attaching the shelf supports to the front frame with the self-tapping screws. Make sure the supports are level and in-line with each other.

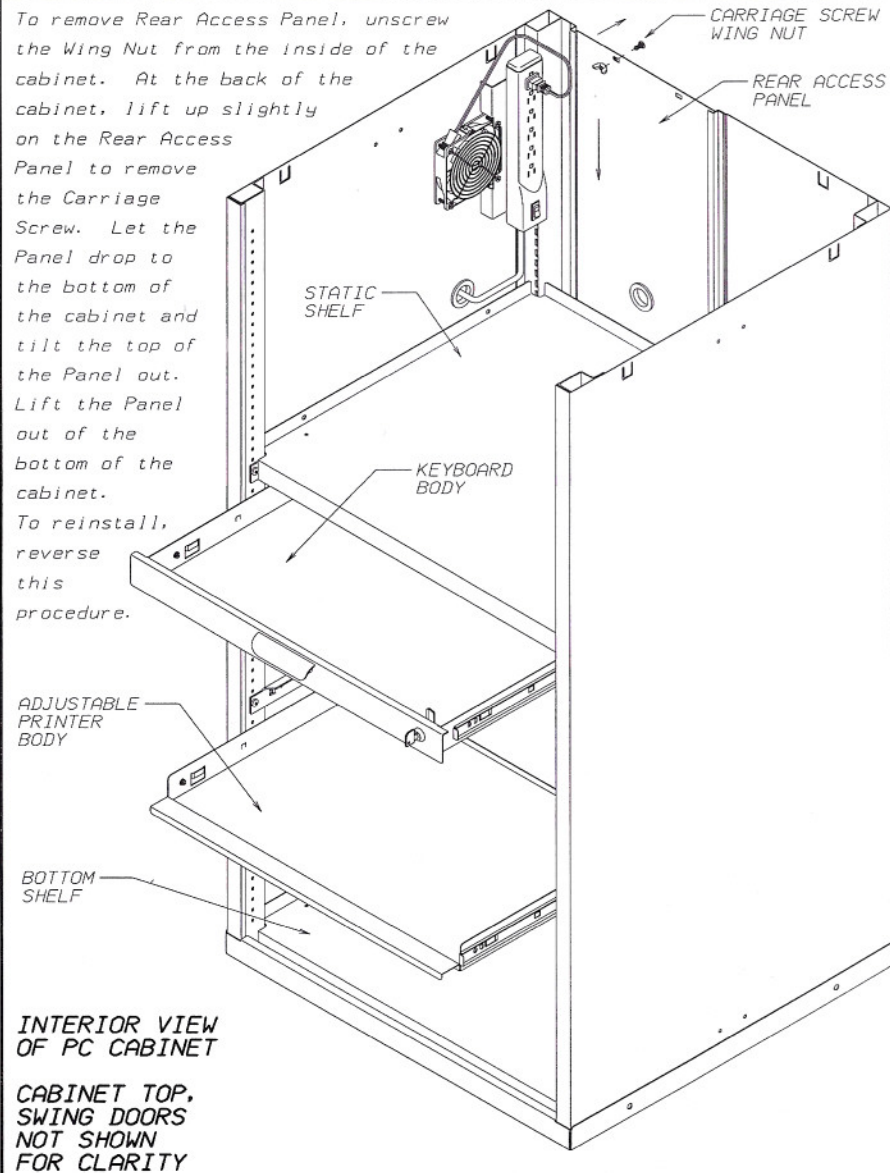

To remove Rear Access Panel, unscrew the Wing Nut from the inside of the cabinet. At the back of the cabinet, lift up slightly on the Rear Access Panel to remove the Carriage Screw. Let the Panel drop to the bottom of the cabinet and tilt the top of the Panel out. Lift the Panel out of the bottom of the cabinet. To reinstall, reverse this procedure.

INTERIOR VIEW OF PC CABINET  
CABINET TOP, SWING DOORS NOT SHOWN FOR CLARITY

REL FOR PROD	---	08-29-01	RE
SYN	REVISION	ECN	DATE BY
RAW P/N	103477	WEIGHT(LB)	FINISH:
DATE	08-29-01	DRAWN BY	RE
		CHECKED BY	DV
<b>LYON</b>		LYON METAL PRODUCTS PO BOX 671 AURORA, IL 60507 (800) 323-0082 FAX: (800) 367-6681	
MDCII	DESCRIPTION PC CABINET OPTIONS/SPECS		
SHEET	DWG NUMBER	REV	
2	SS1379-AA	1	

NOTICE: THIS IS A CONFIDENTIAL DISCLOSED  
OWNED BY SYMBASE SYSTEMS FOR REFERENCE PURPOSES ONLY