


**Step 3**

**Select Decking**


Two to three panels per level are required based on beam width (see chart below).

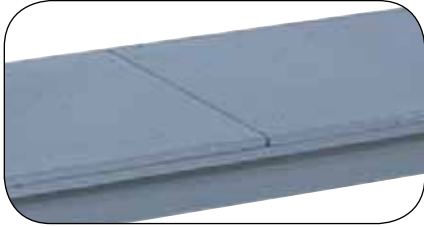


**Solid Decking** - Features Lyon heavy-duty industrial shelves for a smooth uninterrupted decking surface.



**Particle Board Decking\*** - Durable, 5/8" thick particle board decking.

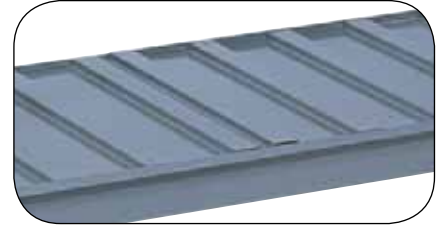

**Ribbed Decking** - Versatile 20-gauge ribbed decking. Ribs allow for space to grab packages easily and prevent pinched fingers. 1 3/4" w x 5/8" d rib.

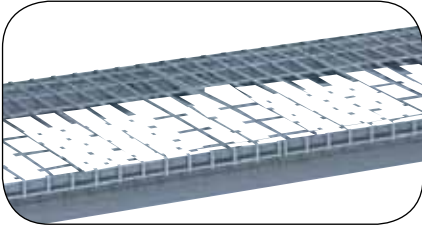

**Wire Decking** - This deck is the best choice when air circulation and light penetration are required. Also allows water to flow in the event a sprinkler system is activated. Available in Frost Gray (add prefix FF to the Cat. No.) Choose heavy-duty waterfall or light-duty flat wire decking:

**Heavy-Duty Waterfall Decking** - Featuring 4" x 2" wire mesh with heavy gauge welded channels for added strength and a 1 1/4" waterfall along both front and rear edge.

**Light-Duty Flat Wire Decking** - Featuring 4" x 2" wire mesh with 5-gauge welded reinforcement wires.

**Beam Width      Quantity of Decking Panels Required**

48"	2 - 24" wide
60"	1 - 24" wide + 1 - 36" wide
72"	2 - 36" wide
84"	2 - 24" wide + 1 - 36" wide
96"	1 - 24" wide + 2 - 36" wide

Parts listed in single pack quantities, for multi-pack quantities, contact Customer Service at 1-800-323-0082

Width	Depth	Ribbed Decking		H. D. Wire Decking		Wire Decking		Solid Decking		Particle Board	
		Cat. No.	Capacity	Cat. No.	Capacity	Cat. No.	Capacity	Cat. No.	Capacity	Cat. No.	Capacity
24"	24"	652241	1,400 lbs.	65454	1,200 lbs.	65454FW	750 lbs.	*	*	*	*
24"	30"	652301	1,200 lbs.	65456	1,100 lbs.	*	*	*	*	*	*
24"	36"	652361	1,000 lbs.	65458	1,200 lbs.	65458FW	920 lbs.	8562H	800 lbs.	72508	750 lbs.
24"	42"	652421	800 lbs.	65460	1,000 lbs.	*	*	8567X	880 lbs.	-	
24"	48"	652481	600 lbs.	65462	1,000 lbs.	65462FW	340 lbs.	8302X	750 lbs.	72528	750 lbs.
36"	24"	653241	1,800 lbs.	65472	1,200 lbs.	65472FW	460 lbs.	8562H	800 lbs.	72508	750 lbs.
36"	30"	653301	1,600 lbs.	65474	1,100 lbs.	*	*	8558H	740 lbs.	*	*
36"	36"	653361	1,400 lbs.	65476	1,200 lbs.	65476FW	545 lbs.	8586X	850 lbs.	*	*
36"	42"	653421	1,100 lbs.	65478	1,000 lbs.	*	*	8589X	820 lbs.	*	*
36"	48"	653481	900 lbs.	65480	1,000 lbs.	65480FW	385 lbs.	8592X	640 lbs.	72532	750 lbs.

Capacities are based on evenly distributed static load, with beams joined by correct number of front-to-back supports and no allowance for shock or uneven loading. Load is limited to support capacity of beams and upright assemblies.

\*Items available through manufactured schedule.