


**ONE TOP TO ONE
CABINET AND PANEL LEG**

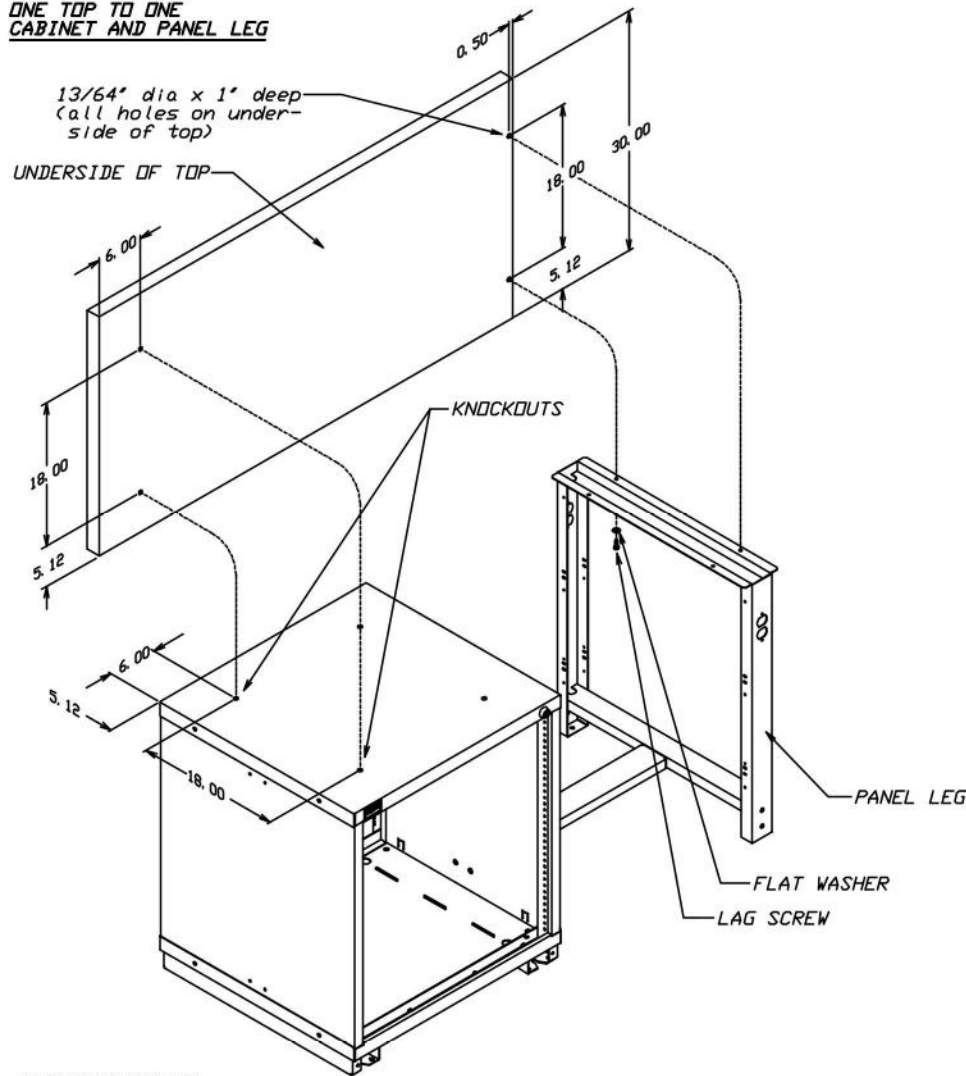


TOP ATTACHMENT

Drill four (4) 13/64" diameter 1" deep holes on the underside of the Top as shown.

Punch Knockouts as shown in top of cabinet and remove sufficient top drawers and carriers and mark for reinstallation.

Align the holes in the top of the Cabinet and Panel Leg with the holes in the Top. Attach with the 1/4" x 1" Lag Screws and 1/4" Flat Washers. (Lubricate the screw threads prior to assembly).

Replace drawers and carriers into specific locations and check for proper drawer operation.

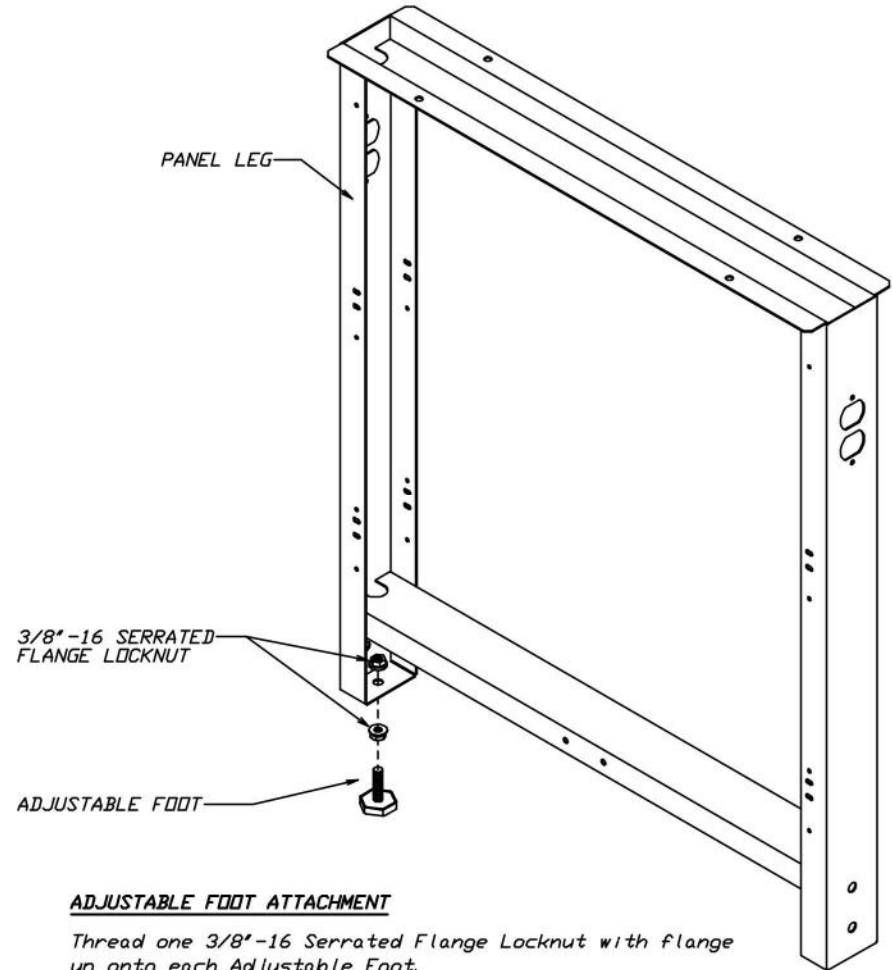


ADJUSTABLE FOOT ATTACHMENT

Thread one 3/8"-16 Serrated Flange Locknut with flange up onto each Adjustable Foot.

Insert this assembly into hole as shown on both sides of Panel Leg. Attach the other 3/8"-16 Serrated Flange Locknut with flange down onto each Adjustable Foot.

Adjust both feet for proper height.

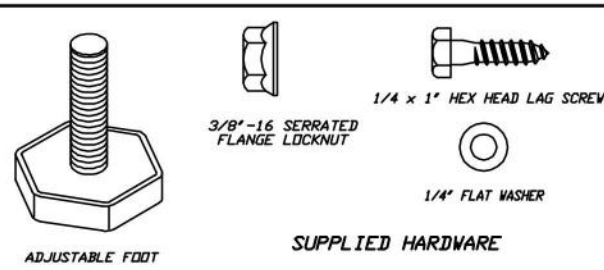

LYON P.O. Box 671
AURORA, IL 60507-0671
PHONE: 630-892-8941
FAX: 800-367-6681

NOTICE: THIS IS A CONFIDENTIAL DISCLOSURE LOANED BY LYON WORKSPACE FOR REFERENCE PURPOSES ONLY

| | | |
|------------------|----------------|-------------------|
| DATE 07-19-12 | DRAWN BY JR | CHECKED BY DWV |
|------------------|----------------|-------------------|

DESCRIPTION
**INSTALLATION
OPEN/CLOSED PANEL LEG
MDC**

| | | |
|------------|---------------------------------|----------|
| SHEET 1 | DRAWING NUMBER SS1870 | REV 1 |
|------------|---------------------------------|----------|