

CABINET HANDLE INSTALLATION

Remove sufficient top drawers and carrier assemblies. Mark specific locations of drawers and carriers for reinstallation. Handle can be mounted on either side of the workstation. However, it is recommended to mount it on the opposite side of the cabinet lock. Attach the cabinet handle as shown using (2) 3/8-16x1 hex head bolts and (2) 3/8-16 flange nuts. Attach the supplied warning label under the cabinet handle at the front of the cabinet.

CASTER INSTALLATION


Place the workstation on its back and attach (4) casters as shown with (16) 3/8-16x1 hex head bolts. Be sure to mount the swivel casters on the same side as the cabinet handle.

** (Maximum capacity for 6" casters is 700 lbs each.

** (The weight of the workstation and its contents cannot exceed 2800 lbs)

PEGBOARD INSTALLATION

Remove the remaining drawers, carrier assemblies and false bottom. Mark for reinstallation. (False bottom is located on side of workstation with swing door). Remove the (2) 3/8-16x1 hex head bolts and 3/8-16 flange nuts at the bottom back of the workstation which were installed at the factory. See owners manual "Cabinet Ganging" section for bending closure tabs. Bend in the two tabs directly above the bottom nut and bolt location that were just removed. Attach the two (2) pegboard panel supports as shown with (4) 3/8-16x1 hex head bolts and (4) 3/8-16 flange nuts. Use (2) 3/8 flat washers as shown between the top half of the workstation and supports to allow for proper spacing. Reinstall all drawers, carriers and false bottom. Attach the pegboard panel to the pegboard panel supports as shown using (4) 3/8-16x1 Hex head bolts and (4) 3/8-16 flange nuts.

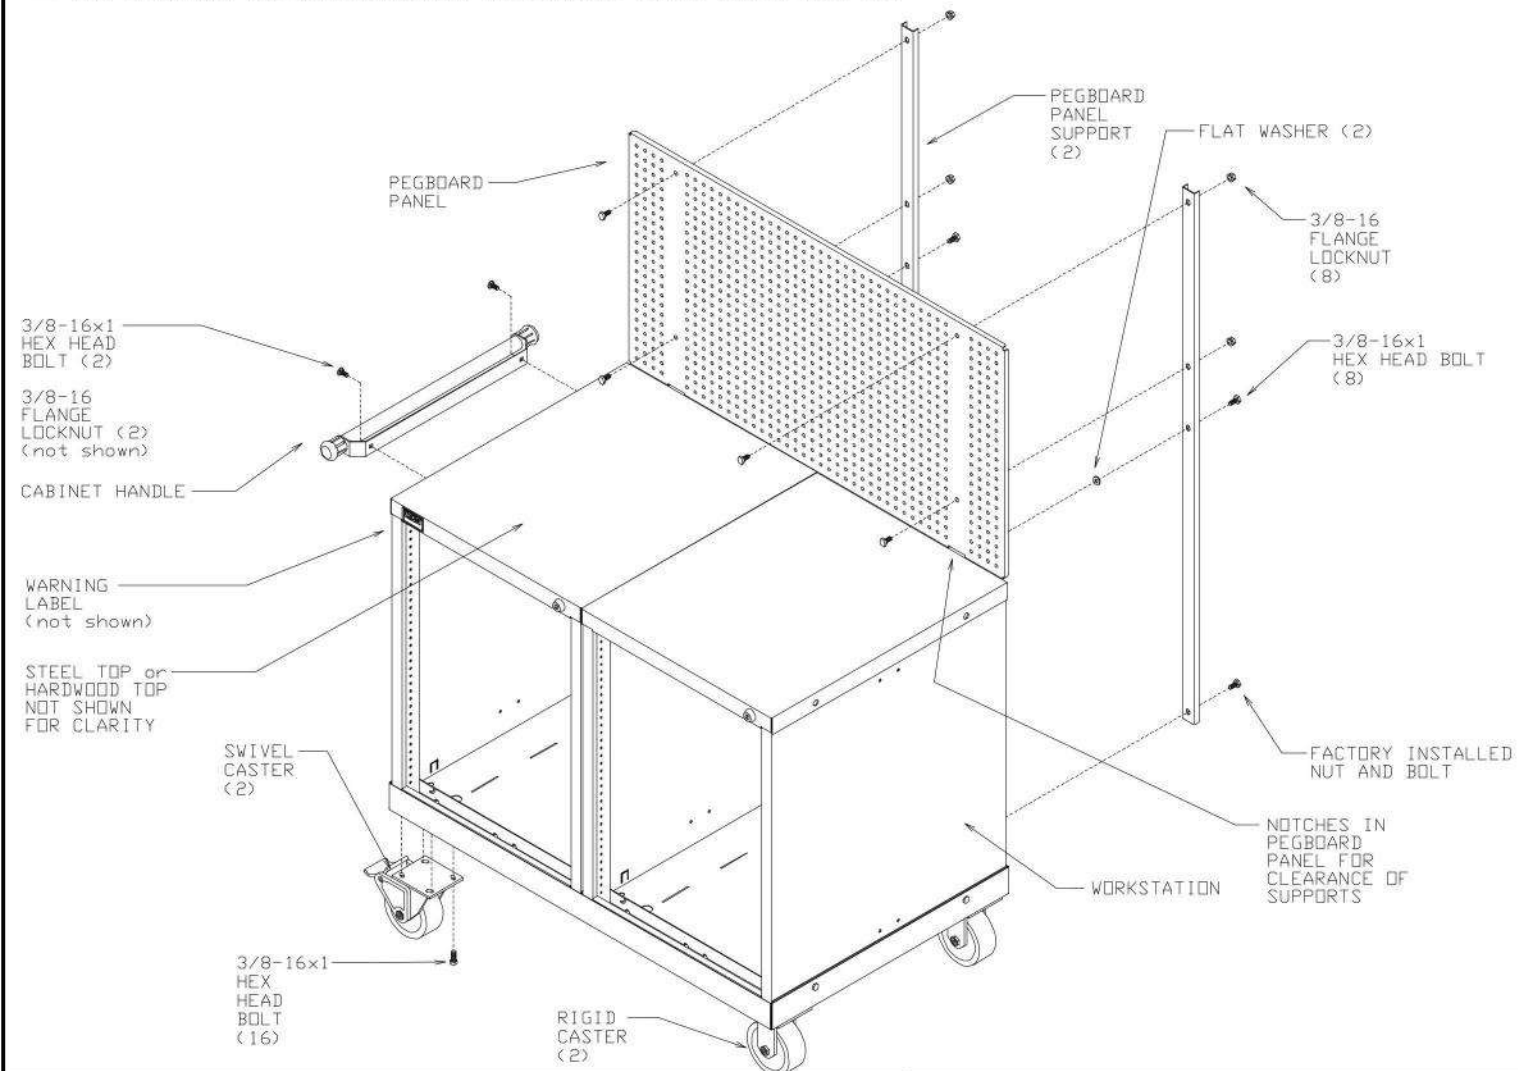

LYON P.O. Box 671
AURORA, IL 60507-0671
PHONE: 630-892-8941
FAX: 800-367-6681

NOTICE: THIS IS A CONFIDENTIAL DISCLOSURE LOANED BY LYON WORKSPACE FOR REFERENCE PURPOSES ONLY

DATE	DRAWN BY	CHECKED BY
01-24-12	JR	DWV

DESCRIPTION:

**INSTALLATION
WORKSTATION
MDC**

SHEET	DRAWING NUMBER	REV
-	SS0515-AA	3